

Experiments on tsunamis generated by a block-slide in an 1 in 500 fjord model

E. Lindstrøm¹, A. Jensen¹, G. Pedersen¹ and S. Glimsdal²

¹Department of Mathematics, University of Oslo, Po.Box 1053, 0316 Oslo, Norway

²Norwegian Geotechnical Institute, Po.Box 3930 Ullevaal Stadion, 0806 Oslo, Norway

Tsunamis generated by sub-aerial landslides in fjord systems affects smaller regions than mega-tsunamis generated by huge earthquakes at subduction zones. On the other hand, the local wave heights and run-up may be much larger than the ones observed even for the largest tsunamis of seismic origin. An unstable rock volume of up to 54 million cubic meters have been detected at Åknes in Storfjorden, western Norway. In relation to this future threat, an experimental investigation were conducted in 2012 at the Coast and Harbor Research Laboratory/SINTEF in Trondheim. A three dimensional model covering the inner part of Storfjorden were constructed in 1:500 scale with a total size of 36×40 meter. A block type slide is released into this model. The position of the slide was monitored by a wire and for synchronization of other measurements (see below) a system was used which sent a trigger signal when the slide started to move.

In true scale the volume corresponds to 40 million cubic meters and the velocity at impact is 39 m/s. There are two ultimate goals of this investigation. Firstly, the measurements give an indication of the consequences of such an slide in the particular fjord. Secondly, it will be a realistic and demanding benchmark problem for model testing.

The model was scanned with a resolution of 5 mm, in figure 1 the scanning is visualized and the slide is marked black (located in the upper left of the figure). The experimental investigation includes measurements of flow depth at a number of locations, in deep water regions and onshore in the two most populated villages, Geiranger and Hellesylt. Geiranger is marked with a red circle and Hellesylt is marked with a black circle in figure 1, wave gauges located in the fjord are marked with red dots. Both resistance wave gauges and acoustic probes are employed to this end. Moreover, particle velocities were measured with acoustic Doppler gauges (Vectrino) at 5 positions. In addition, the shoreline position was recorded digitized from high speed video recordings at Hellesylt, Geiranger and at the facing slope of the slide region.

Striking occurrences of located, very high waves were found in the inundation at Hellesylt, presumably due to bathymetric effects. To scrutinize these phenomena further surface velocities were measured with large scale PTV (particle tracing).

In view of the size and complexity of the experimental model, the results are promising. The repeatability is good and wave gauge measurements are available at a number of locations. These, together with the inundation data and particle velocity measurements should facilitate testing of numerical modeling for this kind of event.

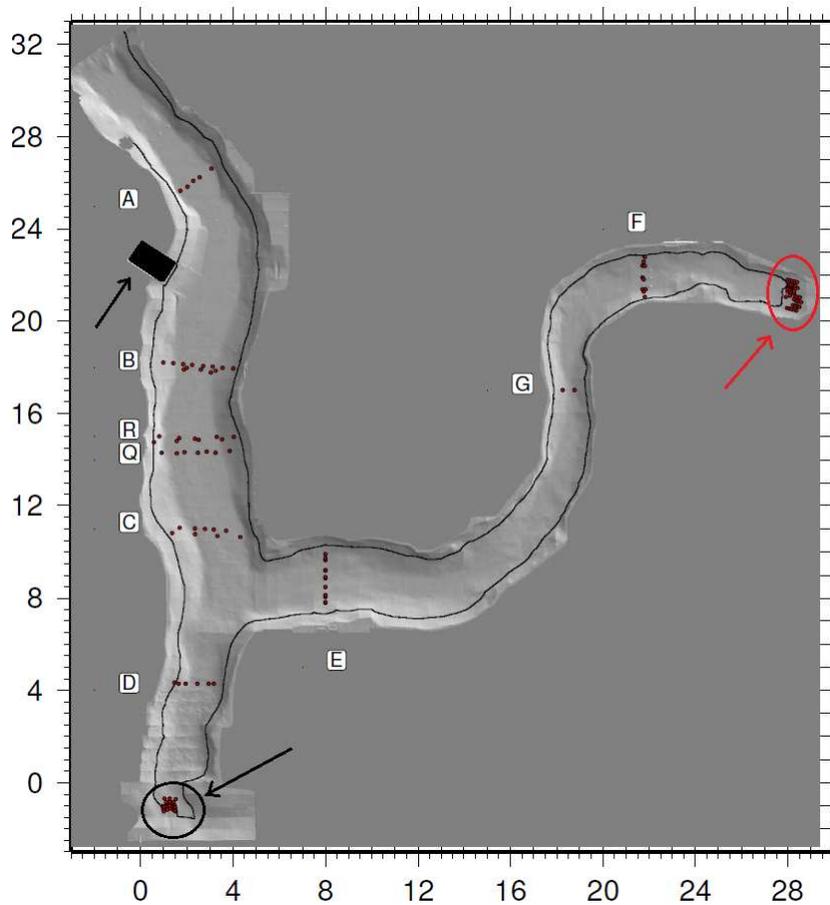


Figure 1: Scanned model. Slide is marked black and positions of gauges are marked with red dots. The black and red circle shows the location of Hellesylt and Geiranger